

# ELEMENTAL

Technical details carpet tiles							
Manufacturing type	Herstellingsart	Mode fabrication	Productie methode	tufted 1/2"			
Construction	Structuur	Structure	Structuur	structured loop pile			
Pile composition	Polymeer	Couche d'usure	Poliammestelling	100% PA 6			
Dye method	Farbgestaltung	Coloration	Kleurverwerking	solution dyed			
Primary backing	Trägermaterial	Premier dossier	Tuflaag	polyester fleece			
Secondary backing	Rückenausrüstung	Dossier	Rug	GREENBASE modified bitumen			
Pile weight	Poleinsatzgewicht	Poids de velour	Poelgewicht	ISO 2424	g/m <sup>2</sup>	600	(+/-)
Total weight	Gesamtgewicht	Poids total	Totaal gewicht	ISO 8543	g/m <sup>2</sup>	4.300	(+/-)
Pile height	Polhöhe	Hauteur du velours	Poelhoogte	ISO 1266	mm	4,0	(+/-)
Total height	Gesamtdicke	Epaisseur totale	Totale dikte	ISO 1265	mm	7,0	(+/-)
Tuft density	Noppenzahl	Nombre de touffes	Aantal punten	ISO 1263	/m <sup>2</sup>	125.000	(+/-)
Size	Abmessung	Dimension	Afmeting	cm	50 x 50	(+/-)	
Packing	Verpackung	Emballage	Verpakking		30 per box	5 m <sup>2</sup>	
Classification	Klassifikation	Classement	Gebrieksklasse	EN 1307	33	heavy commercial	
Comfort rating	Komfortklasse	Classement confort	Comfort klasse	EN 1307	LC1		
Carator chair	Stuhlrotoeregnung	Chaise à roulettes	Rollstoelgeschikt	EN 985	A	intensive	
Dimensional stability	Dimensionsstabilität	Stabilité dimensionnelle	Dimensionele stabiliteit	EN 986	± 3,0%		
Fire resistance	Brennverhalten	Comportement feu	Brandgedrag	EN 13504	Bfl-S1	loose laid	
Permanent antistatic	Permanent antistatisch	Antistatique permanent	Permanent antistatisch	ISO 5956	kV	± 2,0	
Transversal resistance	Durchgangswiderstand	Résistance transversale	Doorgangsweerstand	ISO 10995	□	± 10°	
Thermal resistance	Wärmedurchlaßwiderstand	Résistance thermique	Warmtedoorlaatweerstand	ISO 8303	m <sup>2</sup> /K/W	0,072	
Sound absorption	Schallabsorptionsgrad	Absorption phonique	Geluidsabsorptie	ISO 354	α <sub>w</sub>	0,35	
Impact sound reduction	Trittschallverbesserungsmaß	Isolation phonique	Geluidsisolatie	ISO 10140	ΔL <sub>w</sub>	26 dB	
				ISO 10140	ΔL	43 dB (1000 Hz)	
Colour fastness light	Lichtechtheid	Solidité à la lumière	Lichtecheitheid	ISO 105 B02	8		
Rubbing fastness	Rebechtheid	Solidité au frottement	Wegflechtheid	ISO 105 X12	4-5	wet/dry	
Water fastness	Wasserechtheid	Solidité à l'eau	Waterrechtheid	ISO 105 E01	5	colour/staining	

Scan the QR code and discover the collection.

**Elemental**  
 EN 1307  
 for use as floorcovering in buildings (EN 14041) according to the manufacturer's specification  
 EN 14041  
 DOP 00598T-001


These technical details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request, if available. We reserve the right to alter specifications without notice. Due to the method of manufacture, perfect pattern/colour matching cannot be guaranteed. Shading/pile reversal might occur in cut pile carpets, without affecting overall quality and suitability. It is not considered as a manufacturing fault.



Elemental 9531

www.tapibel.be - sales@tapibel.be

**Tapibel**  
 Industrielaan 4 - Nolimpark 1319  
 B-3900 Pelt - Belgium  
 Tel : +32 11 80 48 50



ELEMENTAL DESIGN COLLECTIONS



# ELEMENTAL DESIGN COLLECTIONS



Elemental 9530 | Nimbus 963130 | Nimbus 963031

# SIENNA & NIMBUS

Technical details carpet tiles							
Manufacturing type	Herstellingsart	Mode fabrication	Productie methode	tufted 1/2"			
Construction	Structuur	Structure	Structuur	structured loop pile			
Pile composition	Polymeer	Couche d'usure	Poliammestelling	100% PA 6			
Dye method	Farbgestaltung	Coloration	Kleurverwerking	solution dyed			
Primary backing	Trägermaterial	Premier dossier	Tuflaag	polyester fleece			
Secondary backing	Rückenausrüstung	Dossier	Rug	GREENBASE modified bitumen			
Pile weight	Poleinsatzgewicht	Poids de velour	Poelgewicht	ISO 2424	g/m <sup>2</sup>	650	(+/-)
Total weight	Gesamtgewicht	Poids total	Totaal gewicht	ISO 8543	g/m <sup>2</sup>	4.300	(+/-)
Pile height	Polhöhe	Hauteur du velours	Poelhoogte	ISO 1266	mm	4,0	(+/-)
Total height	Gesamtdicke	Epaisseur totale	Totale dikte	ISO 1265	mm	7,0	(+/-)
Tuft density	Noppenzahl	Nombre de touffes	Aantal punten	ISO 1263	/m <sup>2</sup>	125.000	(+/-)
Size	Abmessung	Dimension	Afmeting	cm	50 x 50	(+/-)	
Packing	Verpackung	Emballage	Verpakking		30 per box	5 m <sup>2</sup>	
Classification	Klassifikation	Classement	Gebrieksklasse	EN 1307	33	heavy commercial	
Comfort rating	Komfortklasse	Classement confort	Comfort klasse	EN 1307	LC1		
Carator chair	Stuhlrotoeregnung	Chaise à roulettes	Rollstoelgeschikt	EN 985	A	intensive	
Dimensional stability	Dimensionsstabilität	Stabilité dimensionnelle	Dimensionele stabiliteit	EN 986	± 3,0%		
Fire resistance	Brennverhalten	Comportement feu	Brandgedrag	EN 13504	Bfl-S1	loose laid	
Permanent antistatic	Permanent antistatisch	Antistatique permanent	Permanent antistatisch	ISO 5956	kV	± 2,0	
Transversal resistance	Durchgangswiderstand	Résistance transversale	Doorgangsweerstand	ISO 10995	□	± 10°	
Thermal resistance	Wärmedurchlaßwiderstand	Résistance thermique	Warmtedoorlaatweerstand	ISO 8303	m <sup>2</sup> /K/W	0,072	
Sound absorption	Schallabsorptionsgrad	Absorption phonique	Geluidsabsorptie	ISO 354	α <sub>w</sub>	0,35	
Impact sound reduction	Trittschallverbesserungsmaß	Isolation phonique	Geluidsisolatie	ISO 10140	ΔL <sub>w</sub>	26 dB	
				ISO 10140	ΔL	43 dB (1000 Hz)	
Colour fastness light	Lichtechtheid	Solidité à la lumière	Lichtecheitheid	ISO 105 B02	8		
Rubbing fastness	Rebechtheid	Solidité au frottement	Wegflechtheid	ISO 105 X12	4-5	wet/dry	
Water fastness	Wasserechtheid	Solidité à l'eau	Waterrechtheid	ISO 105 E01	5	colour/staining	

Scan the QR code and discover the collection.

**Sienna**      **Nimbus**  
 EN 1307  
 for use as floorcovering in buildings (EN 14041) according to the manufacturer's specification  
 EN 14041  
 DOP 00598T-001  
 SIENNA: DOP 00598T-001  
 NIMBUS: DOP 00598T-001

These technical details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request, if available. We reserve the right to alter specifications without notice. Due to the method of manufacture, perfect pattern/colour matching cannot be guaranteed. Shading/pile reversal might occur in cut pile carpets, without affecting overall quality and suitability. It is not considered as a manufacturing fault.







Elemental - 9555 Elemental - 9551 Elemental - 9550




Sienna - 985550 Sienna - 985150 Sienna - 985051

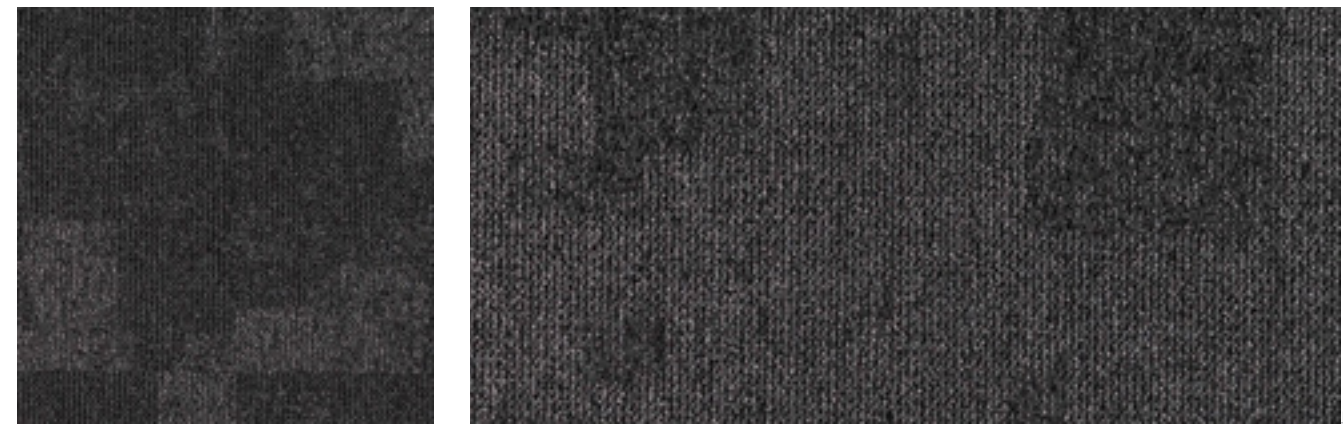


Nimbus - 965150 Nimbus - 965051

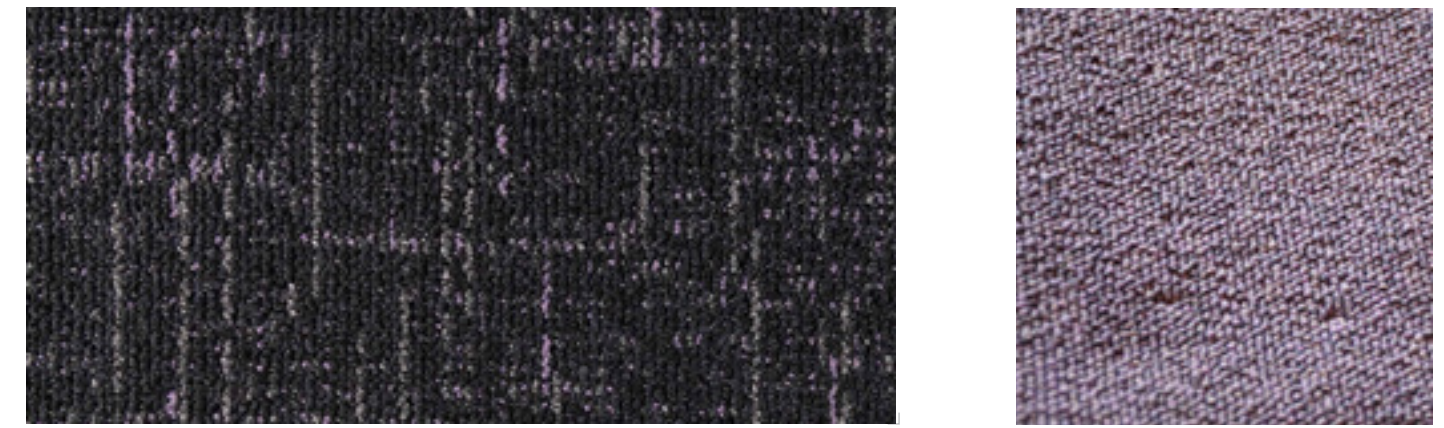

Sienna - 98555097 Elemental - 9597

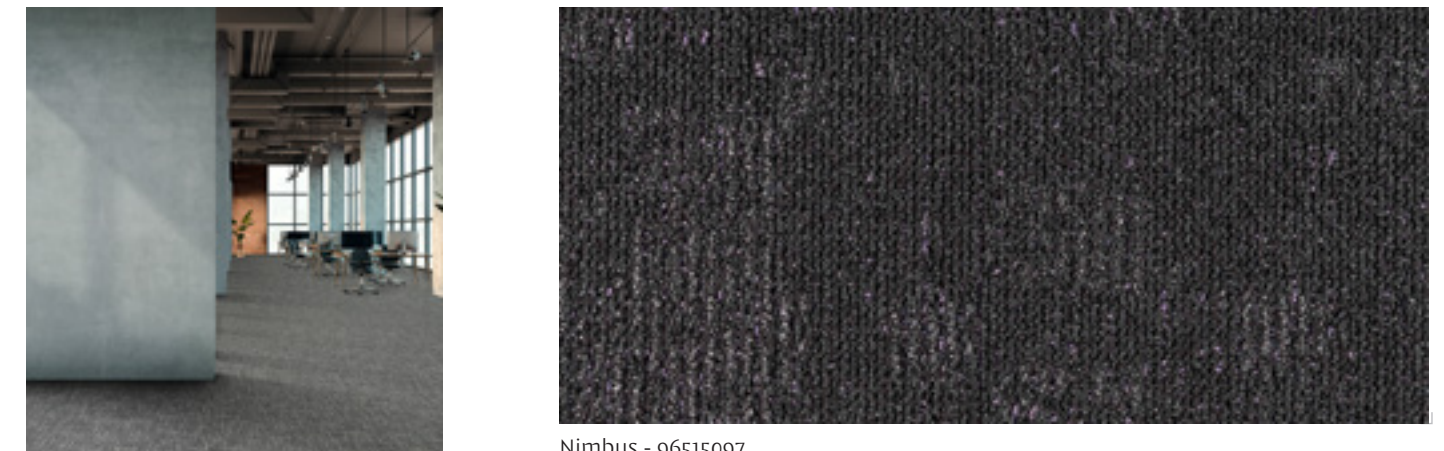


Nimbus - 96515097

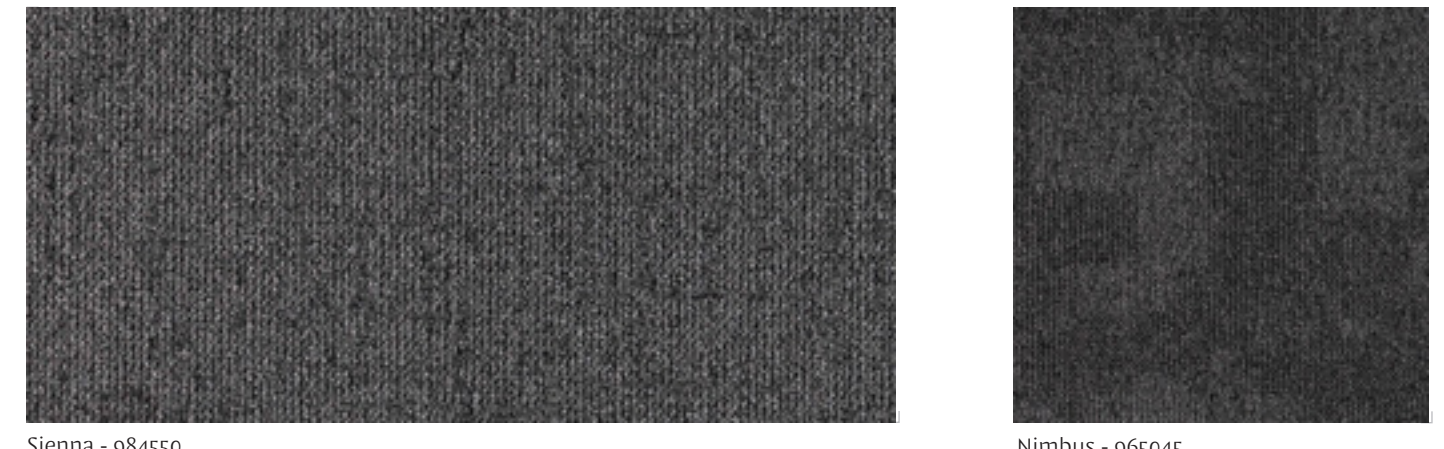

Sienna - 984550 Nimbus - 965045





Elemental - 9545 Elemental - 9544 Sienna - 984544

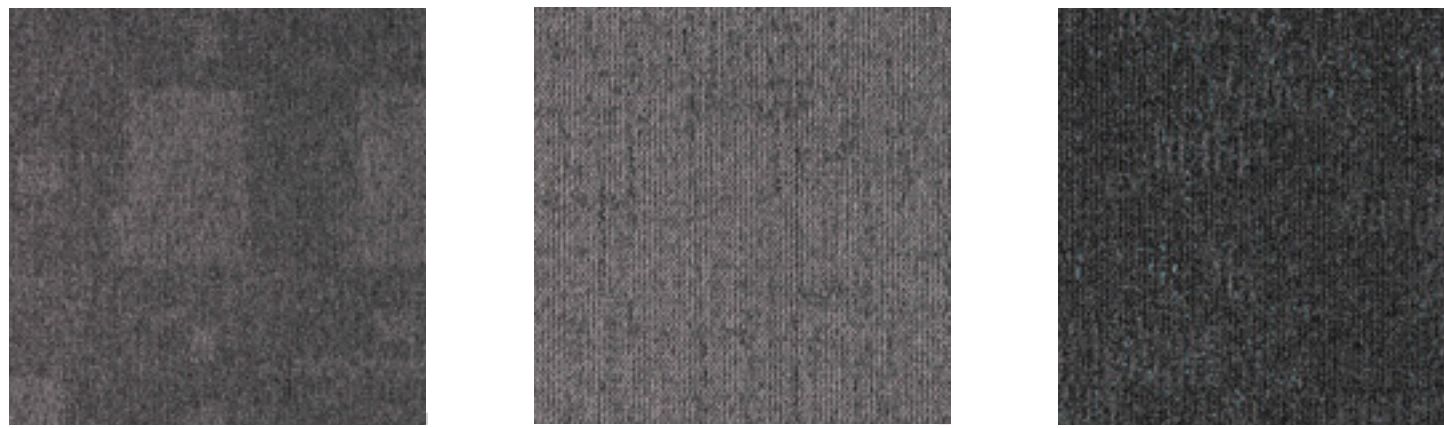


Nimbus - 964544 Sienna - 984445 Nimbus - 96504568



Sienna - 98454468

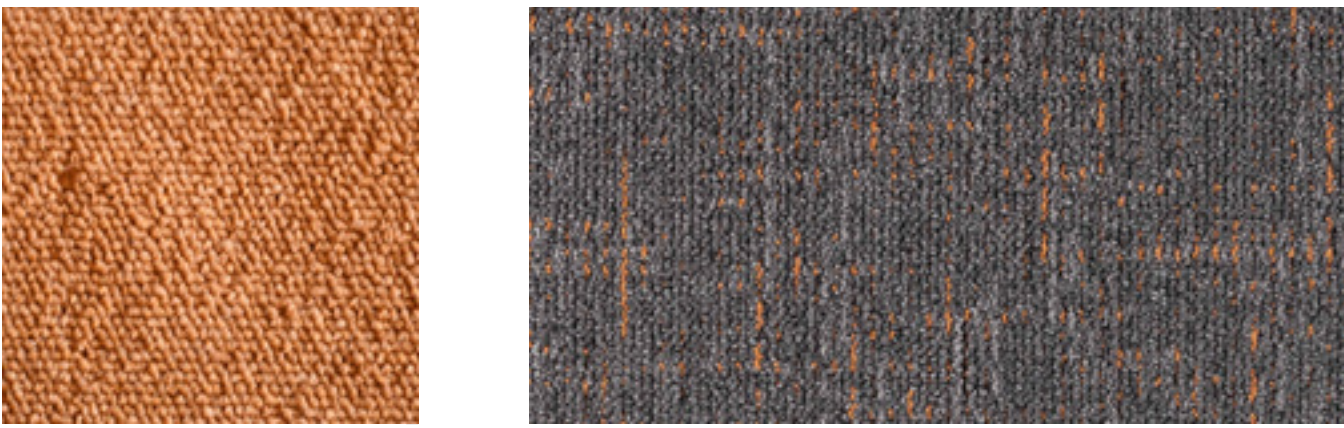


Elemental - 9537 Sienna - 98454437

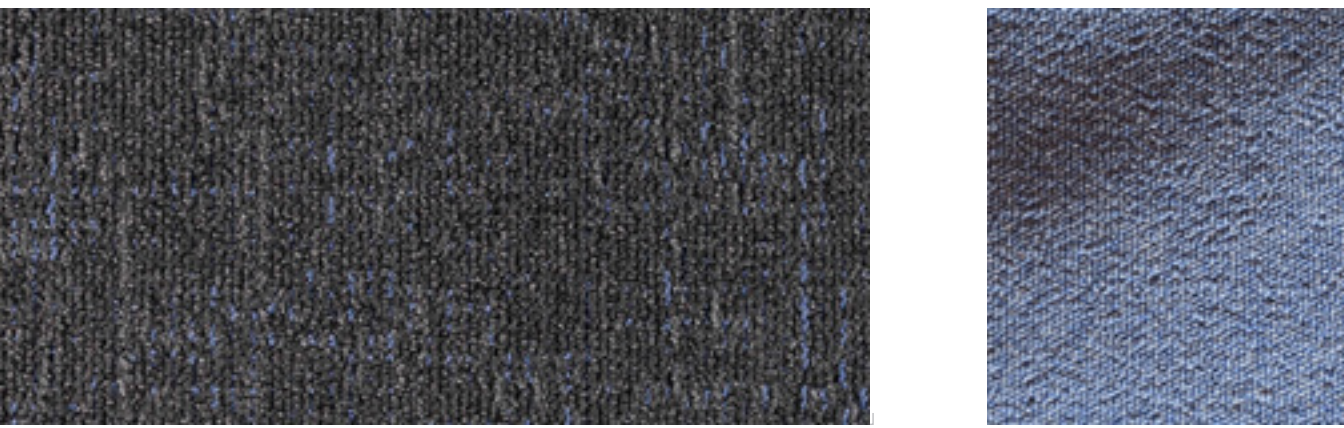


Sienna - 98504567 Elemental - 9567




Nimbus - 96454467

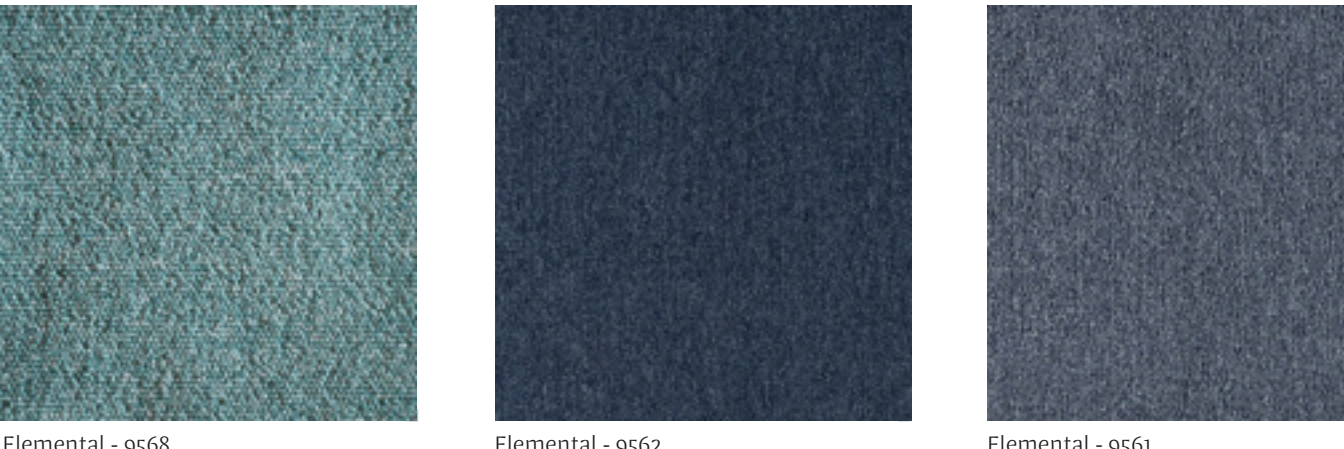

Elemental - 9568 Elemental - 9562 Elemental - 9561

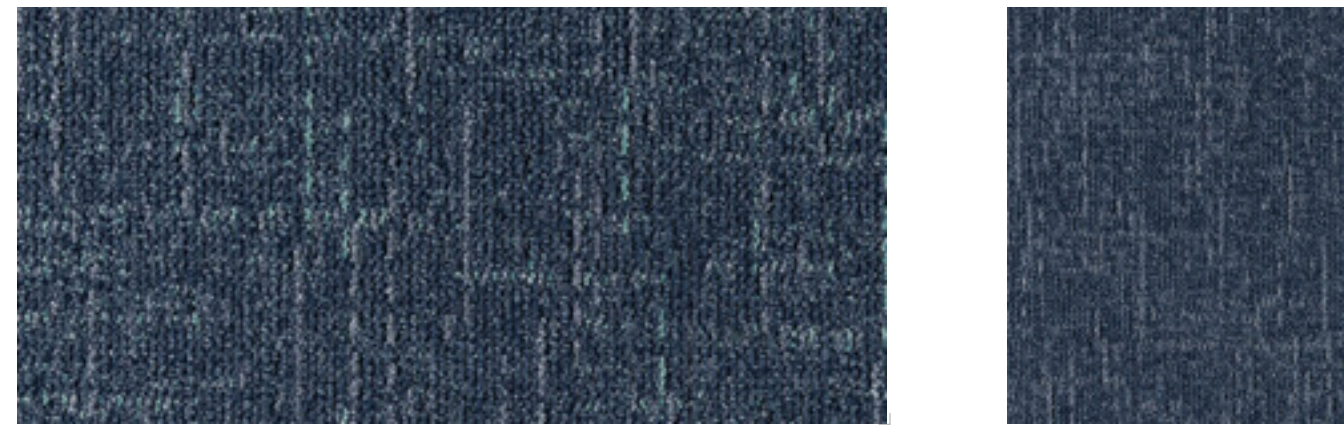

Sienna - 98626168 Sienna - 986261

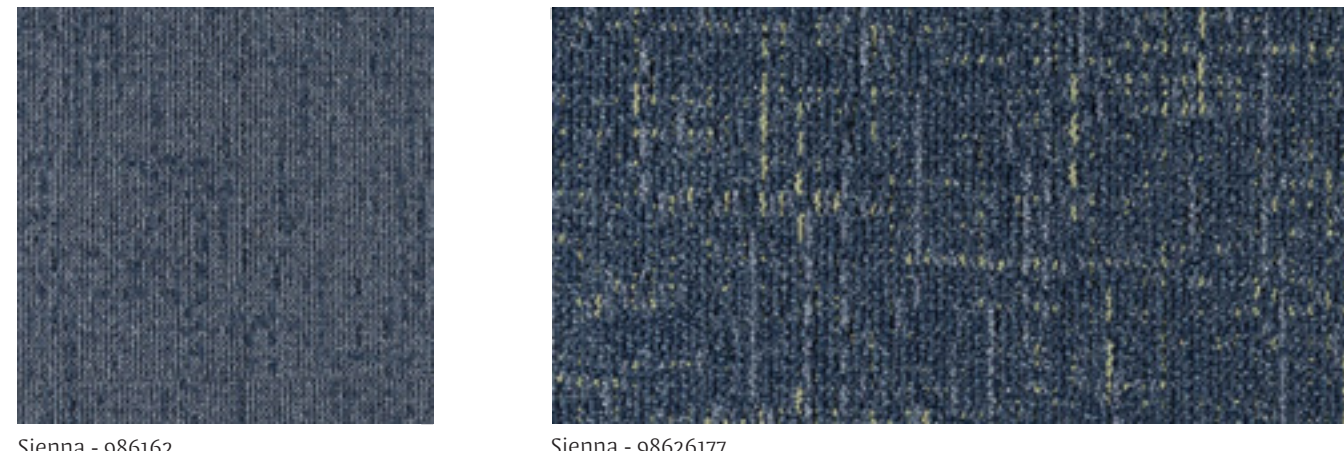


Sienna - 986162 Sienna - 98626177




Nimbus - 966261 Nimbus - 966162




Elemental - 9531 Elemental - 9530 Sienna - 983031

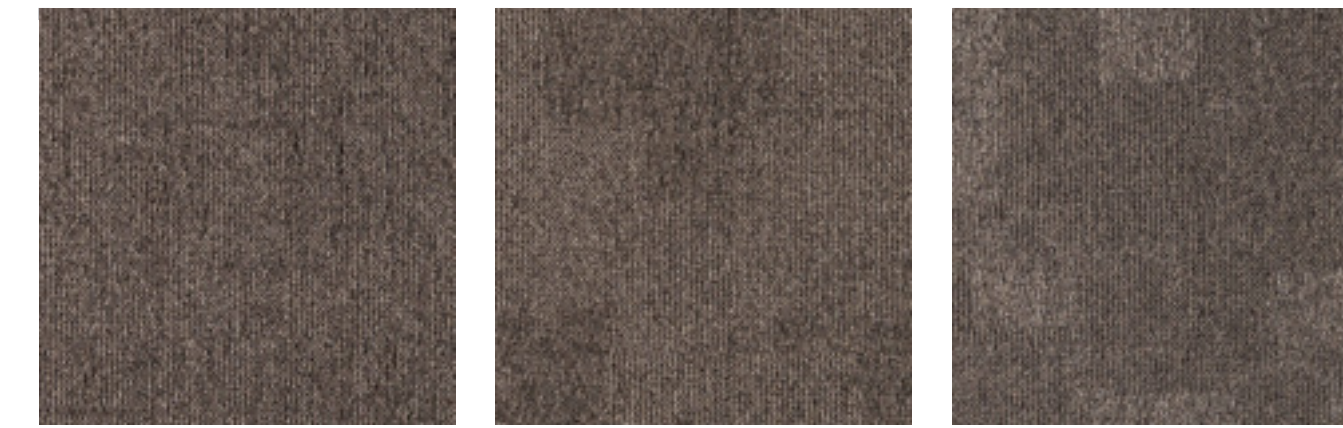

Sienna - 983130 Nimbus - 963130 Nimbus - 963031

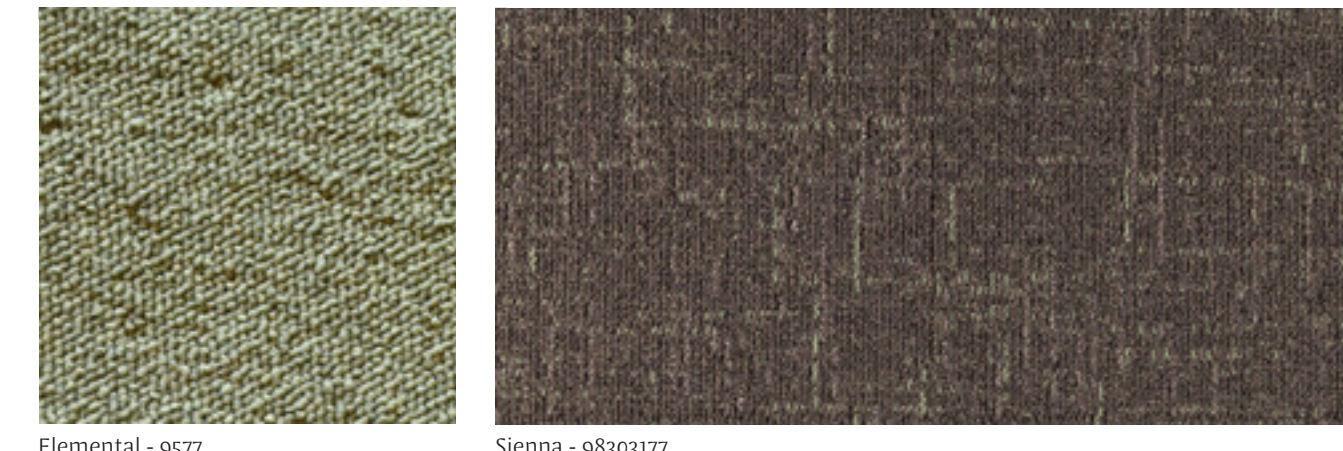

Elemental - 9577 Sienna - 98303177

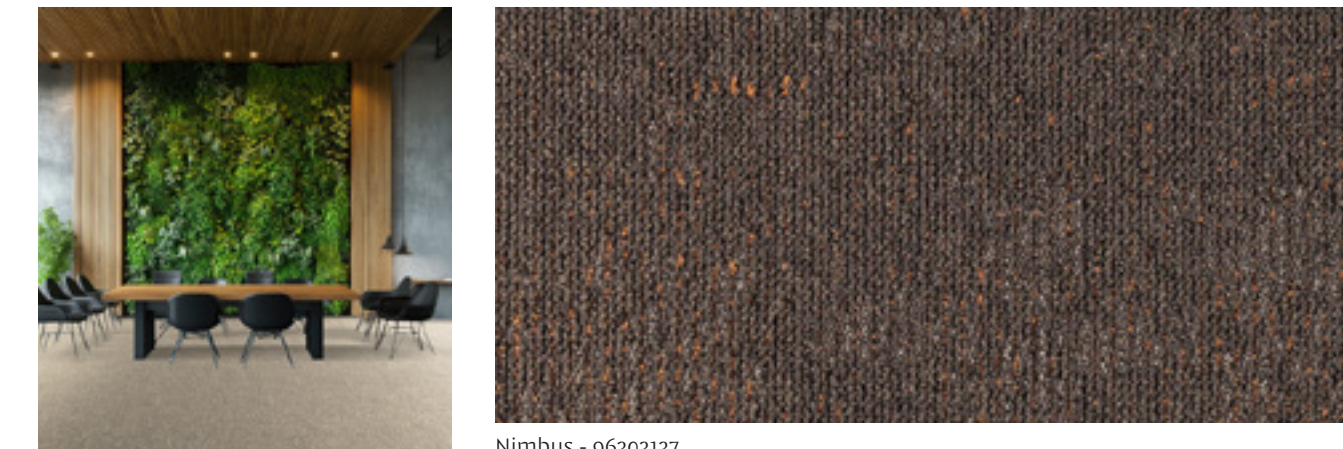

Nimbus - 96303137