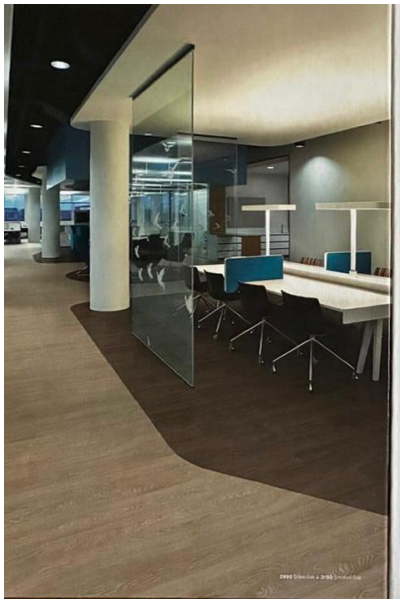

2990 Dried Oak & 3150 Smoked Oak

Forest *fx*

	Standards	Forest fx
Type of Floorcovering	EN 649/ISO 10582	Heterogeneous
Product Enhancement	-	PUR
Gauge	EN 428/ISO 24346	2.0mm
Wear Layer	EN 429/ISO 24340	0.70mm
Roll Size	EN 426/ISO 24341	2m x 20m = 40m²
Total Weight	EN 430/ISO 23997	2700g/m²
General Performance	EN 649 ISO 10582	Conforms Conforms
Use Area	EN 685/ISO 10874	23, 34, 43
Resistance to Chemicals	EN 423	Excellent chemical resistance
Reaction to Fire	EN 13501-1	Class Bfl-S1
Abrasion Resistance	EN 649 EN ISO 10582	Group T Type T
Slip Resistance*	EN 13893 ASTM D 2047 DIN 51130	Class DS (dry condition) R10 R10
Residual Indentation	ISO 24343-1	<0.10mm
Castor Chair Continuous use!	EN 425/ISO 4918	Suitable
Dimensional Stability	EN 434/ISO 23999	<0.40%
Flexibility	EN 435/ISO 24344	(Method A) Pass 20mm Ø
Thermal Conductivity	-	Suitable for underfloor heating (max 27°C)
Electrical Behaviour (body voltage)	EN 1815	<2kV Classified as 'antistatic'
Light Fastness	ISO 105-B02	(Method 3) >6
VOC Emissions	Indoor Air Comfort® GOLD AgBB VOC test Floorscore Swedish BUS (FLEC test) GBC/AFSCBC Green Star IEQ VOC	Eurofins certified product Very low emissions Certified Best Class Compliant
Responsible Sourcing	BCS AGGS	Very Good

Environmentally Preferable Flooring – Polyflor Forest fx PUR achieves a BRE Global A+ rating (EMF 470) in the Green Guide to Specification to use areas such as education and healthcare and is GreenTag LCA Rated certified with Greenfiles level A - Silver Plus. Generic EN 15804 Environmental Product Declaration (EPD) available on request. Recyclable via the Recoffloor scheme. Visit www.polyflor.com/sustainability.

Hygiene – All Polyflor commercial sheet vinyl range provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.

*For safety flooring with sustainable wet slip resistance, refer to Primate range.

100% RECYCLABLE
10% RECYCLED MATERIAL

POLYFLOR® HEAD OFFICE

POLYFLOR LTD. PO BOX 3 RADCLIFFE NEW ROAD WHITEFIELD MANCHESTER M45 7NR UK

UK SALES DIRECT: +44 (0)161 767 1122
UK SAMPLE REQUESTS: +44 (0)161 767 2570
EXPORT SALES DIRECT: +44 (0)161 767 1513
UK FAX: +44 (0)161 767 1128
EXPORT FAX: +44 (0)161 767 1166
TECHNICAL SUPPORT: +44 (0)161 767 1152
RECEPTION: +44 (0)161 767 1100
E-MAIL: INFO@POLYFLOR.COM
WEBSITE: WWW.POLYFLOR.COM

POLYFLOR
LEADING THE WORLD

Forest *fx*

Heavy Commercial Wood Effect Sheet Vinyl Flooring

POLYFLOR

Forest *fx*

Heavy Commercial Wood Effect Sheet Vinyl Flooring

POLYFLOR

Forest *fx*

Heavy Commercial Wood Effect Sheet Vinyl Flooring



Blanched Oak 2013

Rock Salt Oak 3103

Grey Sawmill Oak 3101

Newport Oak 3109

Alaqua Timber 3105

Dried Oak 3104

PARQUET DESIGNS

Pale ash Oak Parquet 3106

Ebon Oak Parquet 3108

Dried Oak 2990

Rural Dackwood 3102

American Oak 3160

Classic Oak 3100

Rustic Oak 3330

European Oak 3340

French Walnut 3120

Smoked Oak 3150

Mahogany 3260

Brazilian Walnut 3990