




voyager PUR transport flooring

VOYAGER™ PUR

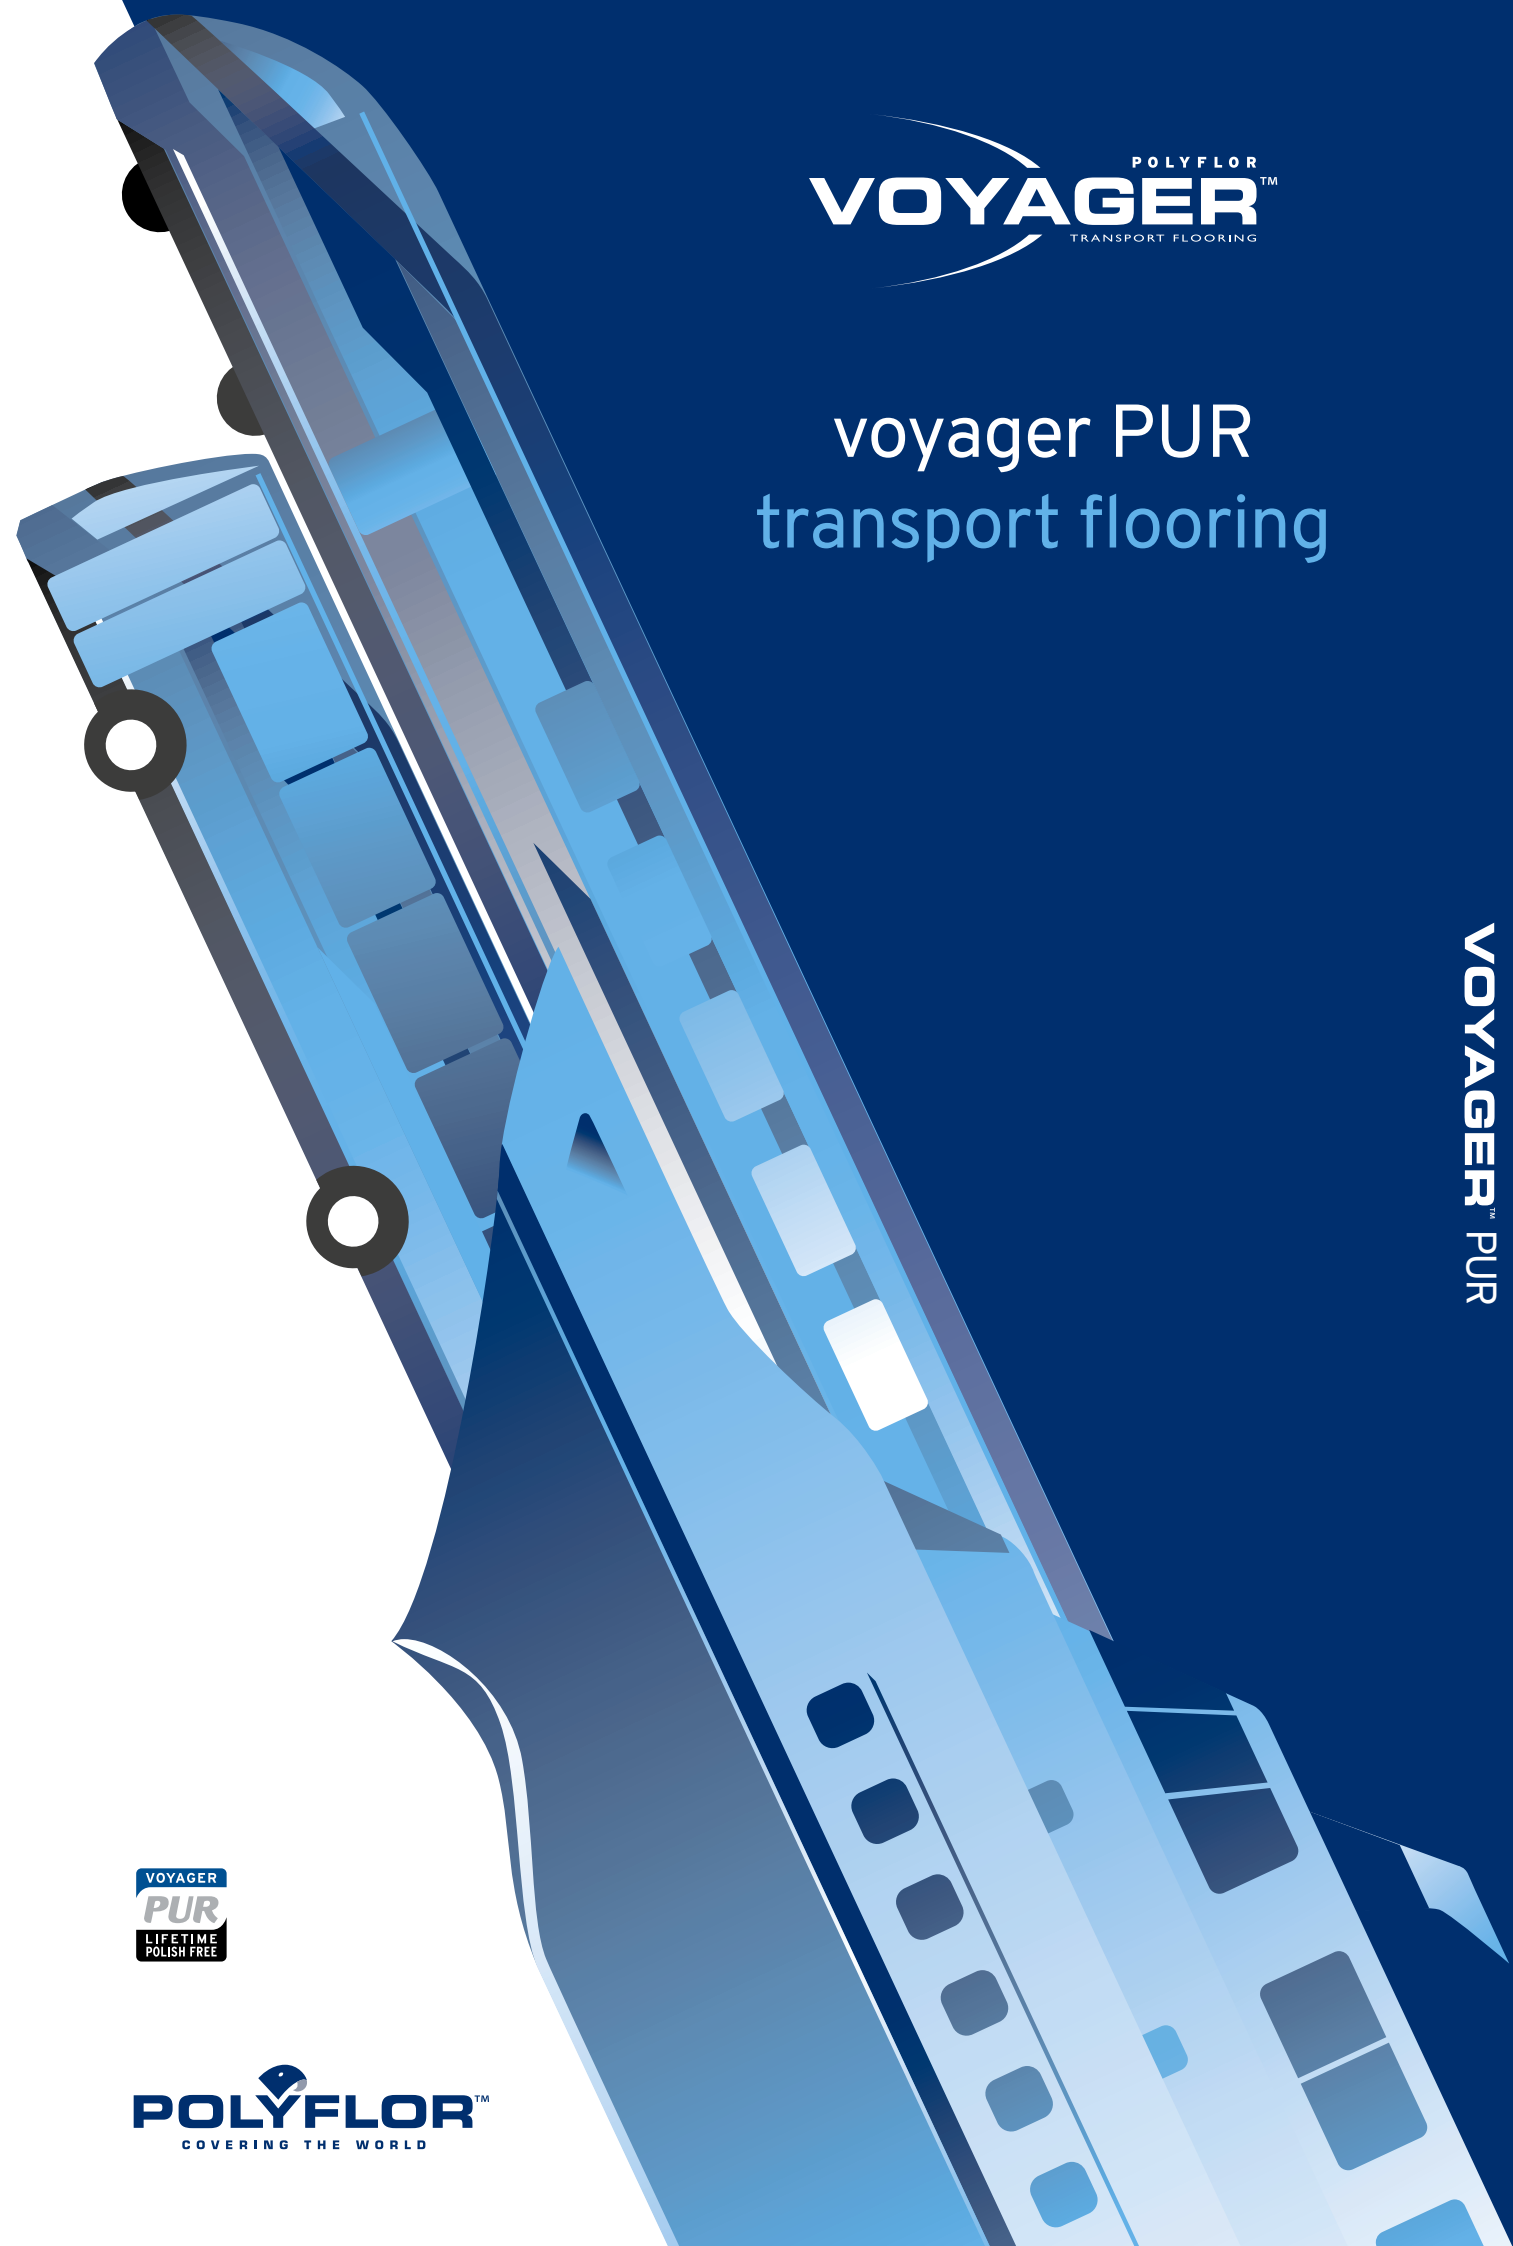

voyager PUR

Heavy-duty floorcovering with a polyurethane reinforcement for low cost, lifelong polish free maintenance. Suitable for road, marine and certain rail applications.

Gauge	ISO 24346 (EN 428)		2.0mm
Roll Size	ISO 24341 (EN 426)		2m x 20m = 40m²
Total Weight	ISO 23997 (EN 430)		3550g/m²
General Performance	ISO 10581 (EN 649) ASTM F1913		Conforms Conforms
Reaction to Fire	IMO MSC 307 (88) Annex 1 Part 2 and 5 EN 13501-1 ASTM E662 ASTM E648		Pass Class Bfl-S1 <450 Class 1
Slip Resistance	EN 13893 DIN 51130 / DIN EN 16165 Ann. B		Class DS R9
Abrasion Resistance	EN 660-2		Group M
Binder Content	ISO 10581		Type II
Sustainability			100% recyclable and contains 25% recycled material
Marine Usage	American Bureau of Shipping Marine Equipment Directive 2014/90/EU SOLAS 74 China Classification Society Class NK		Approved Conforms Conforms Conforms Conforms
Residual Indentation	ISO 24343-1 (EN 433) ASTM F970		≤0.10mm <0.125mm (750psi)
Dimensional Stability	ISO 23999 (EN 434)		≤0.40%
Light Fastness	ISO 105-B02 Method 3		≥6
Notes			For information regarding handling and installation, adhesives, maintenance, and applications, consult Polyflor.



Oct 2024 V008/7

The data presented is correct at the time of printing.
L'information présentée est valable au date d'imprimer.
Sie geben nur einen kleinen Teil des gesamten Dekors und der Farbe wieder.
Los datos presentados eran correctos en el momento de su impresión.



Polyflor Ltd. - Transport Flooring Division
PO Box 3 Radcliffe New Road Whitefield Manchester M45 7NR UK
Tel: +44 (0)161 767 1111 Uk Fax: +44 (0)161 767 2515
Email: transport@polyflor.com
www.voyager.polyflor.com



voyager PUR


transport flooring




8300
NCS S 2010-Y30R w/r 8320
LRV 54




8900
NCS S 1515-Y30R w/r 8900
LRV 52

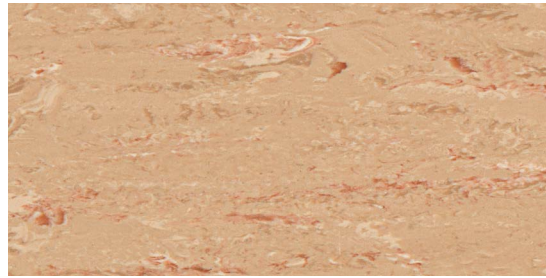


8850
NCS S 3010-Y40R w/r 8850
LRV 39

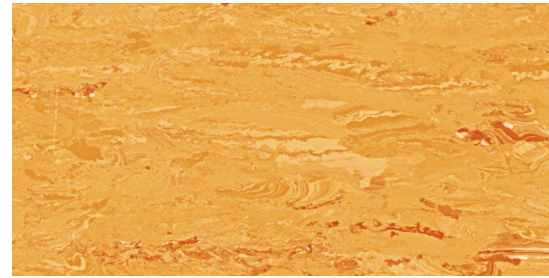


8490
NCS S 2050-Y20R w/r 3070
LRV 41

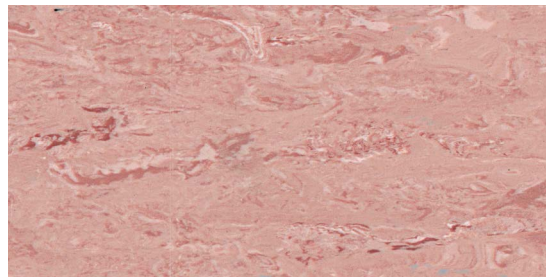


8950
NCS S 3020-Y80R w/r 8950
LRV 37

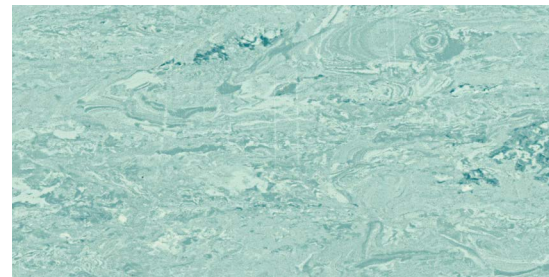


8700
NCS S 2020-B60G w/r 8700
LRV 45

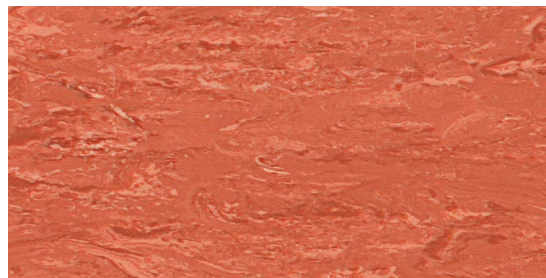


8000
NCS S 3050-Y70R w/r 8000
LRV 23

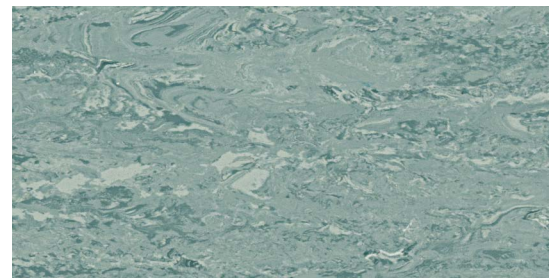

8380
NCS S 4010-B70G w/r 2120
LRV 29

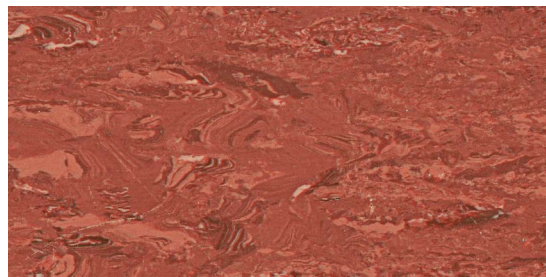


8400
NCS S 3040-Y80R w/r 4120
LRV 16

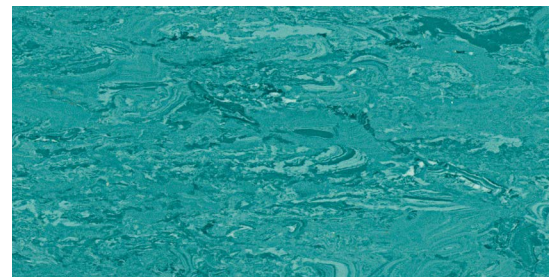


8750
NCS S 4030-B50G w/r 8750
LRV 24




8650
NCS S 2005-R70B w/r 8650
LRV 51

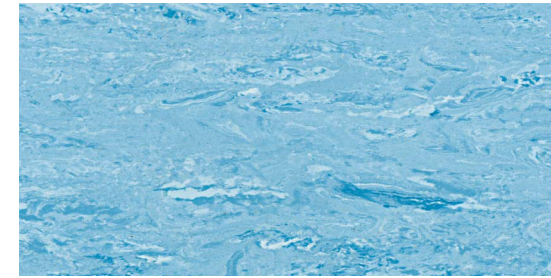


8450
NCS S 2030-B w/r 8450
LRV 42

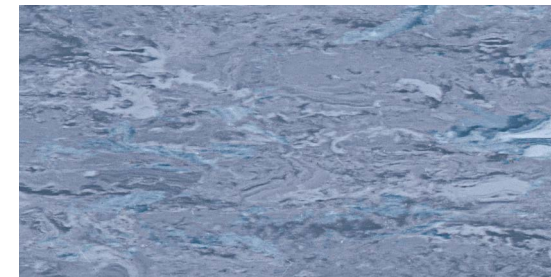

8350
NCS S 4020-R90B w/r 8350
LRV 27

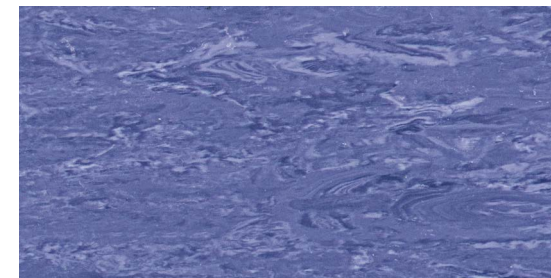

8600
NCS S 4030-R70B w/r 8600
LRV 18

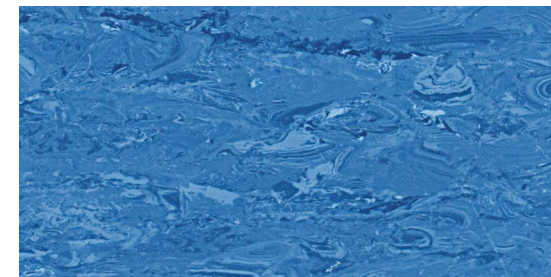


8550
NCS S 4030-R90B w/r 8550
LRV 21



8800
NCS S 2005-Y30R w/r 8820
LRV 60




8500
NCS S 2502-Y w/r 8500
LRV 47

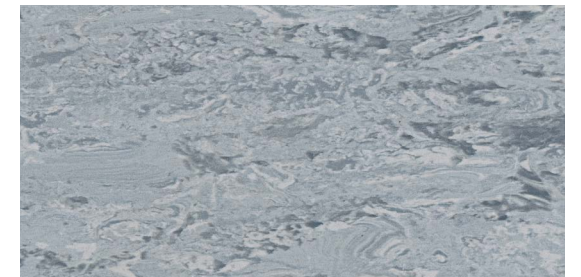

8050
NCS S 3010-R90B w/r 8200
LRV 35



8230
NCS S 4502-B w/r 8230
LRV 29

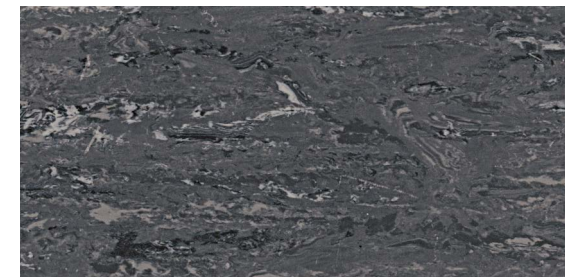

8150
NCS S 7502-B w/r 8270
LRV 12